



ISO 9001:2008 Registered

Style: Ultra C6 Knit Glove



DESIGN

LAYERS: Single Ply

SIZING: One Size

Available in short or long length

MATERIALS

MATERIAL	CONSTRUCTION	WEIGHT	COLOR(s)
Ultra C6	Knit	14.1 oz/yd ²	Black

CARE

Machine wash warm with regular detergent – no chlorine bleach
Tumble dry low heat
DO NOT commercially dry clean

WARRANTY INFORMATION

Your protective glove is warranted by the manufacturer to be free from defects in material and workmanship. This warranty does not cover normal wear or unusual exposures. This warranty is in lieu of all other warranties, express or implied, including but not limited to, implied warranties or marketability and / or fitness for a particular purpose. The manufacturer shall not be liable for incidental or consequential damages.

CERTIFICATION

Level 1 Electric ARC Rated with an ATPV of 6.8 cal/cm² (single ply material) – in accordance with ASTM International Standard Test Method F 1959/F 1959M-05a (see following pages for test report).


All weights and measurements are approximate.

P.O. Box 248 • Lehighton, PA • 18235
Phone: 610-377-6273 • Fax: 610-377-6221
e-mail: cs@majhoods@.net
www.majhoods.com

HOODS AND MORE

Fabric Description:


Majestic, Ultra 6C Rib Knit Gloves (Short Length), 14.1 oz , Black

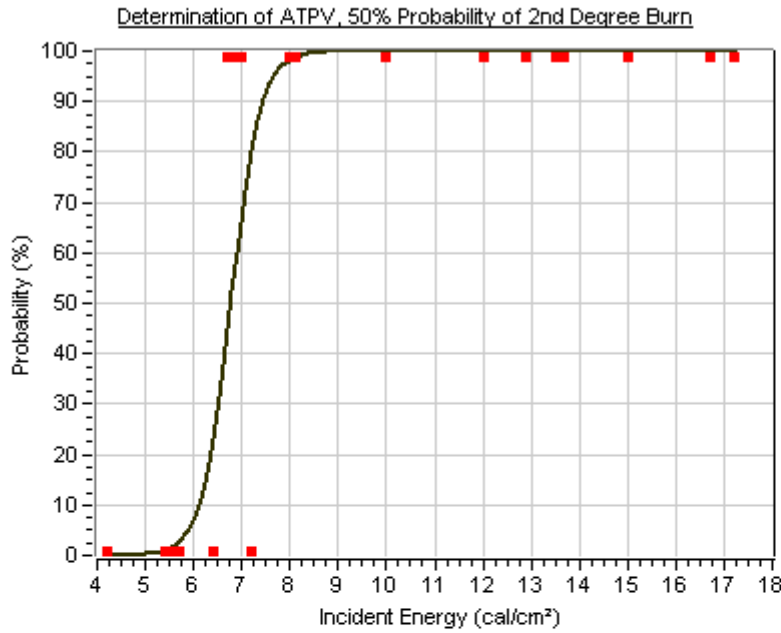

ATPV = 6.8 cal/cm²




Probability of Burn	Ei
5%	5.9
10%	6.1
20%	6.4
30%	6.5
40%	6.7
50%	6.8
60%	6.9
70%	7.0
80%	7.2
90%	7.4

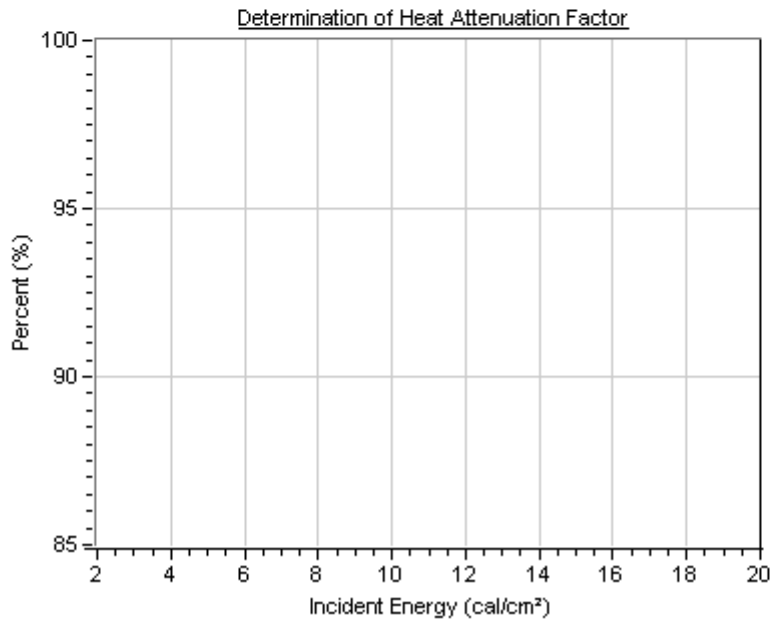Pts = 20
 # Pts above Stoll = 13
 # Pts Break-Open = 0
 # Pts always >STOLL = 10
 # Pts always <STOLL = 6
 # Pts within 20% = 10
 # Pts in mix zone = 4



HAF = 71.3 %

Confidence Intervals
 95% CI = 70.2 , 72.4

Data pts 
 Best Fit 
 95% CI 
 95% CI pts 